

Suitable for CNC Vertical Machining Center(Can do 5 sides machining in one setup)



Standard accessories (No screws, T-caps)




4 pressure plates
Center circle diameter: 17mm
Thickness: 30mm

Pole 35X35 mm, Flux Line 15 mm,
Magnetic Force 580±5% kgf/4 Poles

Applications:

- 1. Suitable for thin, small and medium workpiece on light duty machining.
- 2. Suitable for thin small and medium workpiece of the drilling and finishing machining.
- 3. Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
- 4. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

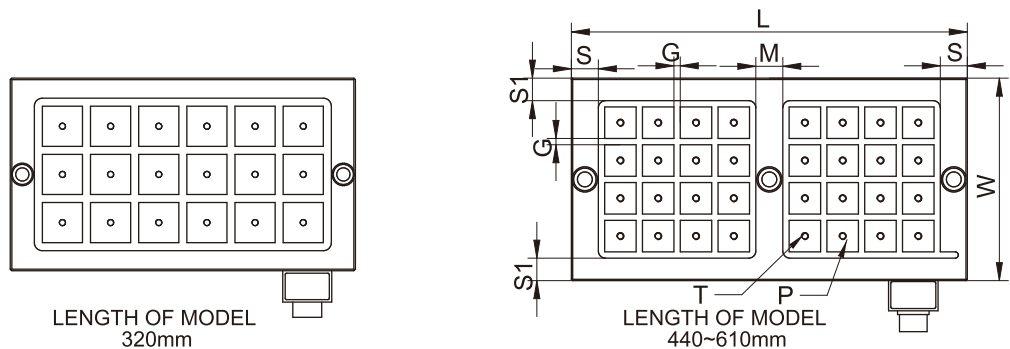

MODEL NO.	DIMENSION							PITCH G	POLE P	NO. OF POLE	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	W	L	S	S1	M	T	H								
EEPM-1530A	185	320	30.5	26	-					18	2610	23kg	CHUCK DC 220V	18A	C1
EEPM-2540A	225	440	30	25	30					32	4640	39kg		30A	C1
EEPM-2560A	225	610	31	25	30					48	6960	54kg		26A	C2
EEPM-3030A	310	320	30.5	25.5	-					36	5220	39kg		26A	C1
EEPM-3040A	310	440	30	25.5	30	M6	50	7	35×35	48	6960	53kg	CONTROLLER AC 220V 480V	25A	C2
EEPM-3060A	310	610	31	25.5	30					72	10440	74kg		31A	C2
EEPM-4040A	435	440	30	25	30					72	10440	75kg		31A	C2
EEPM-4050A	435	525	30.5	25	30					90	13050	90kg		24A	C4
EEPM-4060A	435	610	31	25	30					108	15660	104kg		26A	C4

Customization is available.