

Suitable for CNC Vertical Machining Center(Can do 5 sides machining in one setup)



Standard accessories (No screws, T-caps)





4 pressure plates
Center circle diameter: 17mm
Thickness: 30mm

Pole 92X92 mm, Flux Line 50 mm,
Magnetic Force 4800±5% kgf/4 Poles

Applications:

- 1. Suitable for large and high-thickness workpiece
- 2. Minimum size of workpiece required as 4 alternate magnetic square poles and above contacts is necessary for optimum clamping.
- 3. More functions for cooperate with Induction Block and Spring Block. (See the detail of Option Accessories)

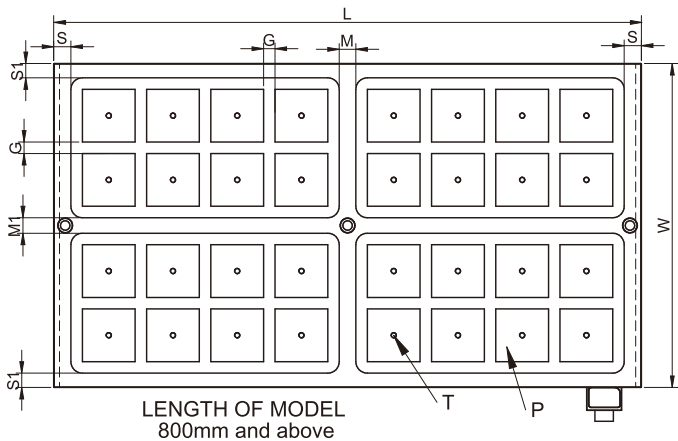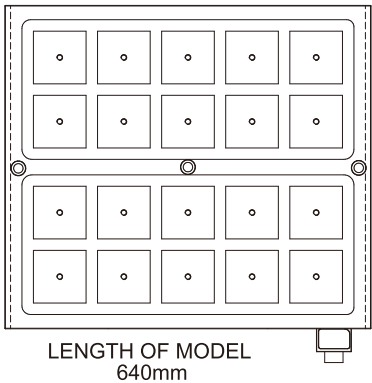

MODEL NO.	DIMENSION								PITCH G	POLE P	NO. OF POLE	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (included)
	W	L	S	S1	M	M1	T	H								
EEPM-6060E	565	640	30	25	--	27					20	24000	214kg	CHUCK DC 380V	24A	C2H
EEPM-60100E	565	1025	30	25	29	27					32	38400	343kg		13A	C4H
EEPM-60120E	565	1250	30	25	30	27					40	48000	418kg		24A	C4H
EEPM-8080E	790	800	30	25	28	28	M10	70	20	92×92	36	43200	374kg	CONTROLLER AC 380V~440V	26A	C4H
EEPM-80100E	790	1025	30	25	29	28					48	57600	480kg		19A	C4H
EEPM-80120E	790	1250	30	25	30	28					60	72000	585kg		15A	C8H

Unit:mm

Customization is available.